

**50  $\Delta t$** 

(75/65/20°C)


Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
<b>1800</b>	160	202	147985	742	2532	£972.71	£1,167.25
	200	242	147986	928	3167	£1,043.04	£1,251.65
	240	282	147987	1114	3802	£1,111.36	£1,333.63

$\Delta t50$  is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t40$  or  $\Delta t30$  output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).


For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.

**CENTRE TAP TRV NOW AVAILABLE**


Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00




### SIDE VIEW

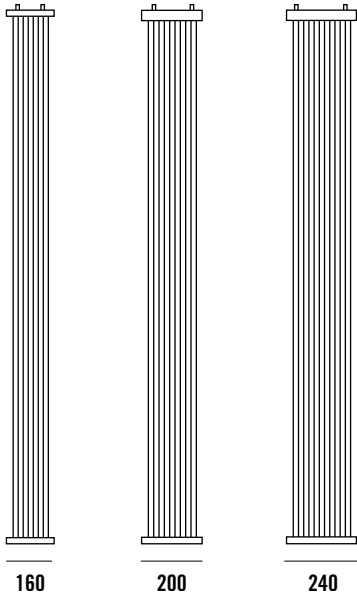

### FRONT VIEW

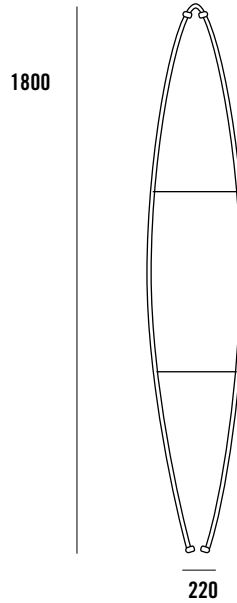


### BRACKETS ASSEMBLY

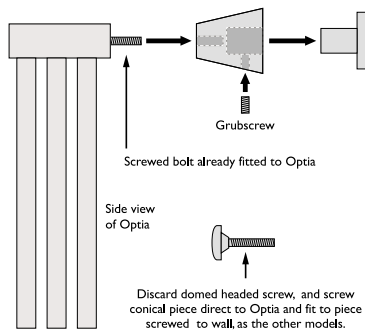

All dimensions in mm.

### BRACKETS POSITIONS

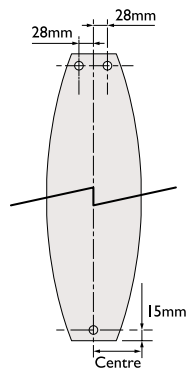

### CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

### EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Height	1800	1800	1800
Length	160	200	240
Btu/hr	2532	3167	3802
Watts	742	928	1114
Tapping centres (mm)	50	50	50
Centres from wall (mm)	42	42	42
Max. projection (mm)	202	242	282
Weight (kg/m)	9	11	13
Water contents (l/m)	2.51	3.06	3.61