

50 Δt

(75/65/20°C)

STRAIGHT SINGLE


Height mm	Length mm	Tap centres	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
731	450	400	148581	342	1167	£288.70	£346.44
	600	550	148582	447	1525	£304.95	£365.94
1186	450	400	148583	530	1808	£365.16	£438.19
	600	550	148584	694	2368	£390.67	£468.80
1511	450	400	148585	666	2272	£417.61	£501.13
	600	550	148586	869	2965	£455.26	£546.31
1771	450	400	148587	777	2651	£472.47	£566.96
	600	550	148588	1010	3446	£509.79	£611.75

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00




CONCORD RAIL

Aqua Series

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

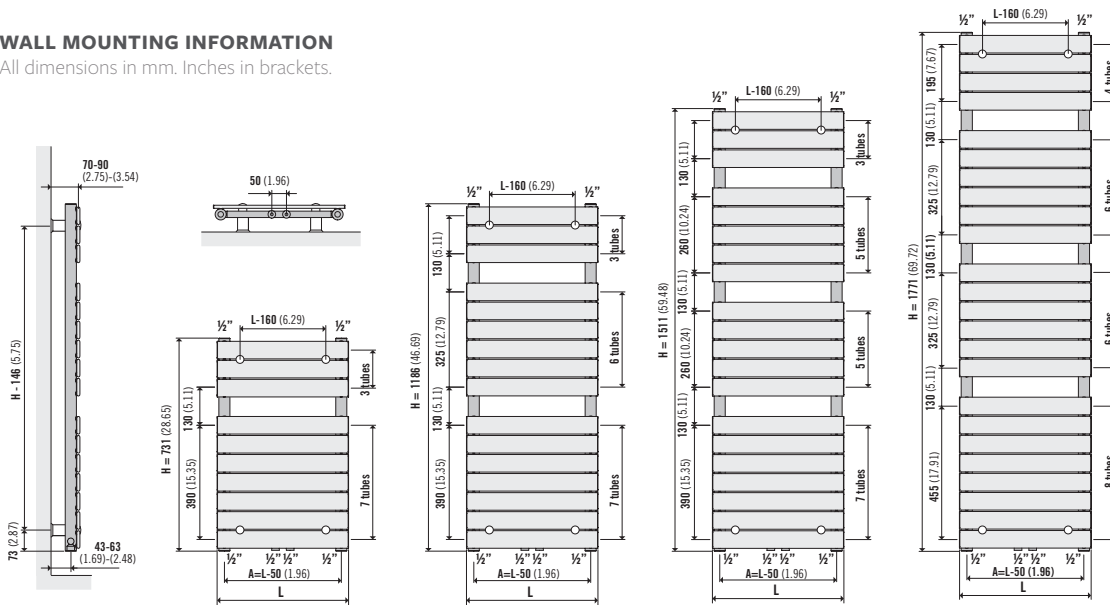


CONNECTIONS

Each radiator comes with $\frac{1}{2}$ " inlet connections as standard.

PIPING OPTIONS

Single

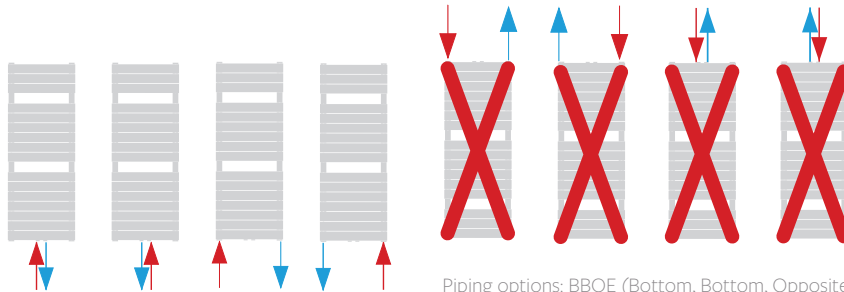

Piping options: BBOE (Bottom, Bottom, Opposite, End)

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single							
Height	731	731	1186	1186	1511	1511	1771	1771
Length	450	600	450	600	450	600	450	600
W/m at 75/65/20	342	447	530	694	666	869	777	1010
n-coefficients	1.21	1.20	1.25	1.23	1.24	1.23	1.24	1.23
Heated surface area (m ² /m)	0.82	1.03	1.32	1.66	1.65	2.08	1.97	2.48
Weight (kg/m)	8.90	11.20	14.30	17.90	17.90	22.40	21.40	26.80
Water contents (l/m)	3.20	3.80	5.20	6.20	6.60	7.80	7.80	9.30

COLOUR GUIDE

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

RAL COLOURS

						
RAL 7035 Pale grey	RAL 7038 Agate grey	RAL 7036 Platinum grey	RAL 7030 Stone grey	RAL 7037 Dusty grey	RAL 7015 Slate grey	RAL 9005* Jet black
						
RAL 8017 Chocolate brown	RAL 1016 Sulphur yellow	RAL 1021 Cadmium yellow	RAL 1004 Dark Golden yellow	RAL 2008 Light red orange	RAL 3000 Flame red	RAL 3003 Ruby red
						
RAL 3005 Wine red	RAL 6027 Light green	RAL 6034 Pastel turquoise	RAL 6019 Pastel green	RAL 6033 Turquoise blue	RAL 6020 Chrome green	RAL 6005 Light moss green
						
RAL 5014 Pigeon blue	RAL 5002 Ultramarine blue	RAL 5024 Pastel blue	RAL 5022 Night blue	RAL 5010 Gentian blue	RAL 9016** Traffic white	RAL 9010† Pure white
						
RAL 9001 Cream	RAL 1013 Pearl white	RAL 1015 Light ivory	RAL 9002 Grey white			

Metallic Colours

		
2765G Metallic silver	BR 0004 Gilded aluminium	BR 0007*** Satin metal grey

Where indicated products are only available in this colour: *Excel **Standard white ***Arc, Wave, Optia.
Where indicated products come as standard in RAL 9010 Pure White: †Esprit, Vistaline & Ellipse.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM



RAL 9016*
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com